



**FAMILY OWNED
SINCE 1890**

SPI 112 Industrial Aerial Platform



Shown with Optional Equipment

Sutphen Petrochemical and Industrial Aerials are the industry's most reliable, and most demanded apparatus on the market. Sutphen is the leader in highest flow, highest elevation, and workable foam streams for industrial firefighting. The Sutphen aerial can flow up to 4000 gpm at 100' of elevation from a pressurized water source, a feature unmatched by any other manufacturer.



APPARATUS BODY

- CONSTRUCTION:** Heavy duty, corrosion resistant, #304 Stainless Steel body, Huck-bolted to the frame
- DOORS:** ROM roll up doors painted or brushed finish, hinged doors optional
- HOSEBED:** Capacity for up to 700' of 6" LDH
- TANK:** Capacity for up to 1000 gallons, foam or water
- AIR BOTTLE STORAGE:** Capacity for up to 7 air bottles stored in the fender wells

PUMP

- Hale 8fg 3000 gpm**
- FOAM SYSTEMS:** Foam Pro Accumax or National Foam Servo Command, or Williams Hot Shot
- DISHCHARGES:** (3) 6" right, (1) 2.5" right, (1) 2.5" left, foam concentrate discharge 3" right or left, (2) 1.75" rosslay, 5" rear discharge
- MONITORS:** (2) TFT Monsoon, 2000 gpm each, remote operated.


FEATURES

- Mid-mount design allows for a lower center of gravity, resulting in a more stable and better handling apparatus.
- Huck-bolted, 4-sided box design boom provides superior strength and rigidity, and results in a 3:1 safety factor.

- The Sutphen waterway, electrical cables, and breathing air hoses are completely enclosed inside the box boom, providing excellent protection for those systems.
- The Sutphen aerial tower may be rested against a roof cornice or building, if necessary, without causing costly repairs to the waterway unlike most other designs.
- Aerial is constructed of #6061-T6 aluminum that will withstand extreme climate and intense heat situations. The aerial is left unpainted for ease of maintenance and lower repair cost.
- All Sutphen aerial apparatus are rated for 50 MPH winds; a direct testament to the box boom's strength.
- The aerial device is rated with a 1000# tip load when dry, and 750# while flowing water.
- Patented "X" Jacks stabilizer system.

SUTPHEN

SPI 112 Industrial Aerial Platform

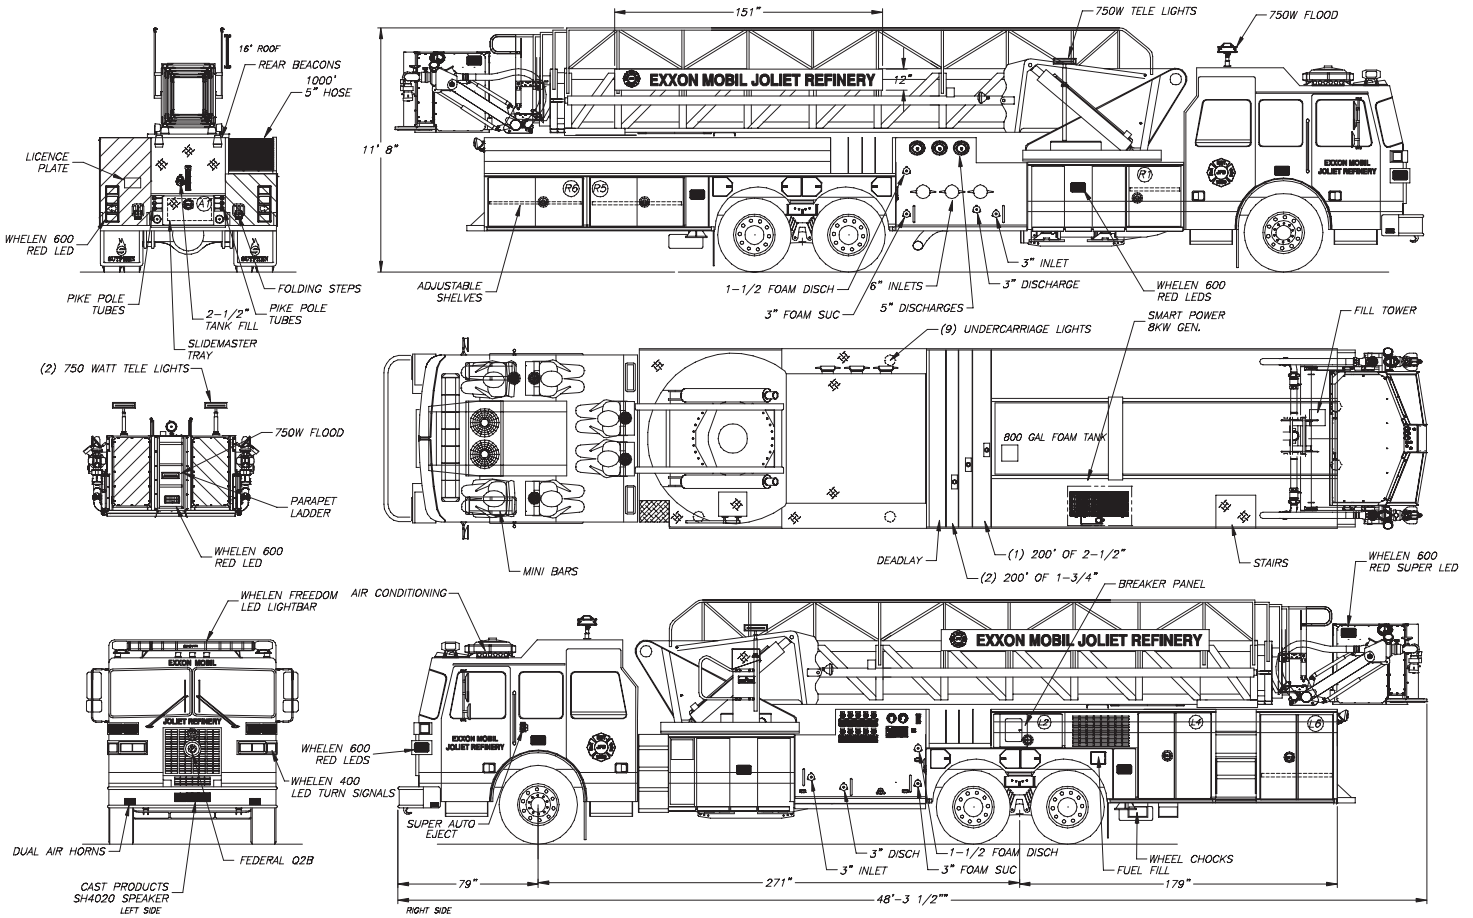

LEFT SIDE

DOOR OPENINGS

COMP'T	HEIGHT	WIDTH
L2	15	50 1/4
L4	24 3/4	37 1/2
L6	43 3/4	37 1/2

LEFT SIDE

COMP'T DIMENSIONS

HEIGHT	WIDTH	DEPTH
19 1/2	58	26 1/2
48 1/2	45 3/4	26 1/2
48 1/2	45 3/4	26 1/2

RIGHT SIDE

DOOR OPENINGS

COMP'T	HEIGHT	WIDTH
A	31	36 3/4
R5	24 3/4	39 7/8
R6	24 3/4	39 7/8

RIGHT SIDE

COMP'T DIMENSIONS

HEIGHT	WIDTH	DEPTH
34 3/8	42 1/2	26 1/2
28	45 3/4	26 1/2
28	45 3/4	26 1/2

REAR COMPARTMENT

DOOR OPENINGS

COMP'T	HEIGHT	WIDTH
A1	15 3/4	27

REAR COMPARTMENT

COMP'T DIMENSIONS

HEIGHT	WIDTH	DEPTH
14 1/4	25 1/2	88 3/4



SUTPHEN™

SUTPHEN CORPORATION P.O. Box 0158, Amlin, OH 43002

Tel: 614.889.1005 • Toll Free: 800.848.5860 • Fax: 614.889.0874

Web: www.sutphen.com • E-mail: sutphen@sutphencorp.com



SPI 112 Industrial Aerial Platform 2012